



NiUU one

# FLUSH AND MODULAR DESIGN FOR A COMPETITIVE PRICE

## NiUU<sup>®</sup> one

### Material

**Standard:** 30 mm Melamine Faced Chipboard with ABS edging

**Superfront:** 30 mm HPL faced chipboard with ABS edging (option)

*This HPL faced chipboard is equipped with a stronger layer structure (0.8 mm HPL), making it extra resistant to knocks and surface scratches. Ideal for high traffic areas.*

### Configurations and height

#### Standard:

Floor mounted with pedestal feet under front pilasters and overhead braced satin anodized aluminum headrail

*Standard overall height: 2000 mm including 150 mm floor clearance*

*Maximum overall height: 2300 mm including 100 - 230 mm floor clearance.*

#### Optional:

Floor-mounted with recessed pedestal feet and overhead-braced with satin anodized aluminum headrail

*Standard overall height: 2000 mm including 150 mm floor clearance*

*Maximum overall height: 2300 mm including 100 - 230 mm floor clearance.*

Floating effect with recessed pedestal feet and recessed satin anodized aluminum headrail

*Standard overall height: 2000 mm including 150 mm floor clearance*

*Maximum overall height: 2135 mm including 100 - 215 mm floor clearance.*

Full-Height/Floor-to-Ceiling.

*Maximum overall height: 2800 mm including 30 mm floor clearance under the doors.*

### Depth

Up to 1600 mm in one piece.

*Partitions larger than 1600 mm are provided with a tongue-and-groove joint and re-enforced with an additional supporting leg and stabilizer. In case of floor-to-ceiling configuration the partition will be jointed from 1200 mm.*

### Profiles

#### Standard:

All profiles are made of satin anodised aluminum E6EV1 and rounded for safety reasons (radius 2 mm).

Torsion resistant, flush stabilizer 45/43 mm above the door.

Wall connections via U-profiles to allow for construction tolerances.

#### Optional:

Wall connections via shadow gaps made of satin anodized aluminum E6EV1

### Hinges

#### Standard:

2 robust, 3-roller edge spring hinges made of aluminum (20 mm in diameter, length 145 mm) with a maintenance free stainless-steel center. Hinges are non-detachable, fastened with six screws and come with a stainless-steel pin for self-closing doors.

#### Optional:

2 robust, 3-roller edge spring hinges made of stainless steel 304.

# FLUSH AND MODULAR DESIGN FOR A COMPETITIVE PRICE

## NiUU<sup>®</sup> one

### Supporting legs

#### Standard:

Legs made of anodized aluminum E6EV1 (Ø 20 mm), with a stainless-steel 304 foot plate, infinitely adjustable, firmly screwed onto the cubicle elements using a M12 thread.

The solid, corrosion-free aluminum covering rosette can be easily lifted for cleaning purposes.

#### Optional:

Legs made entirely of stainless steel 304 (20 mm) with a stainless-steel 304 foot plate, infinitely adjustable. The solid, covering rosette made of stainless steel can be easily lifted for cleaning purposes.

### Locks and door handles

#### Standard:

Double-latch lock with metal latch and metal whisper trap for a silently closing door.

L-shaped door handle and turning lock made of aluminum with square emergency lock release, locking status visible inside and outside.


*For disability adapted doors, the Aluminum Grip bar GS 25 - 400 mm will be recommended.*

#### Optional:

- Nylon knobs
- Aluminum knobs
- Stainless steel knobs
- Nylon lever handle U-shaped
- Aluminum door handle U-shaped
- Stainless steel door handle L-shaped
- Stainless steel door handle U-shaped
- Aluminum Grip bar GS 25 - 400 mm
- Aluminum Grip bar GS 25 - 800 mm
- Aluminum Grip bar GS 40 - 430 mm
- Aluminum Grip bar GS 40 - 430 mm with LED-indicator
- Aluminum Grip bar GS 40 - 1165 mm
- Aluminum Grip bar GS 40 - 1165 mm with LED-indicator
- Aluminum Grip bar GS 40 - 1300 mm
- Aluminum Grip bar GS 40 - 1300 mm with LED-indicator



L-shaped door handle

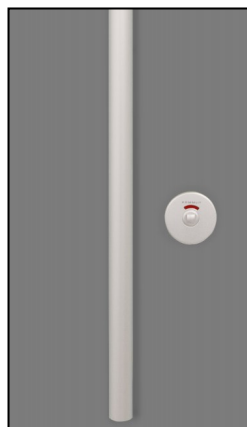

Grip bar GS 25



Grip bar GS 40  
with LED indicator

FLUSH AND MODULAR DESIGN FOR A COMPETITIVE PRICE

**NiUU**<sup>®</sup> one




Floating configuration with recessed pedestal and headrail and shadow gap wall connection




Full height floor-to-ceiling configuration with grip bar GS 40-1300 LED

# NiUU one Colour chart

## Panels and doors



Traffic white **9317**<sup>2</sup>  
Similar to NCS S 0502-G50Y



Granite white **9317P**



Light grey **7208**<sup>2</sup>  
Similar to NCS S 2500-N



Quartz grey **7708**<sup>2</sup>  
Similar to NCS S 5000-N



Graphite **7808**<sup>2</sup>  
Similar to NCS S 7502-B



Cappuccino **1117**  
Similar to NCS S 3010-Y60R



Corn yellow **1708**  
Similar to NCS S 1070-Y10R



Orange **2717**  
Similar to NCS S 0570-Y40R



Garnet red **3708**  
Similar to NCS S 3060-R



Pacific blue **5715**  
Similar to NCS S 2060-R90B



Lagoon blue **5408**  
Similar to NCS S 1030-R90B



Silver **7408**



Lemon green **6715**  
Similar to NCS S 1060-G60Y



Yew rustic **0017**<sup>1</sup>



Oak natural **0117**<sup>1</sup>



Spruce rustic **0217**<sup>1</sup>

## ABS edging



Traffic white **9317**  
Similar to NCS S 0502-G50Y



Light grey **7208**  
Similar to NCS S 2500-N



Quartz grey **7708**  
Similar to NCS S 5000-N



Graphite **7808**  
Similar to NCS S 7502-B



Yew rustic **0017**



Oak natural **0117**



Spruce rustic **0217**

Last update: March 2020

<sup>1</sup> With extra charge | <sup>2</sup> Available in Superfront with extra charge

Please note that the represented colours may slightly differ from the original ones. Don't hesitate to ask for samples.